

DATE	DN	REVISION RECORD	AUTHORITY	DESIGN AUTHORITY	DR.	CHK.	APVD
19AP02	A	RELEASED PRODUCTION PER 020017	164161				



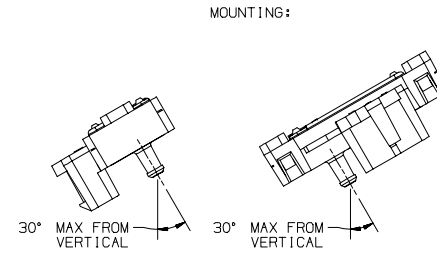


FIGURE 3

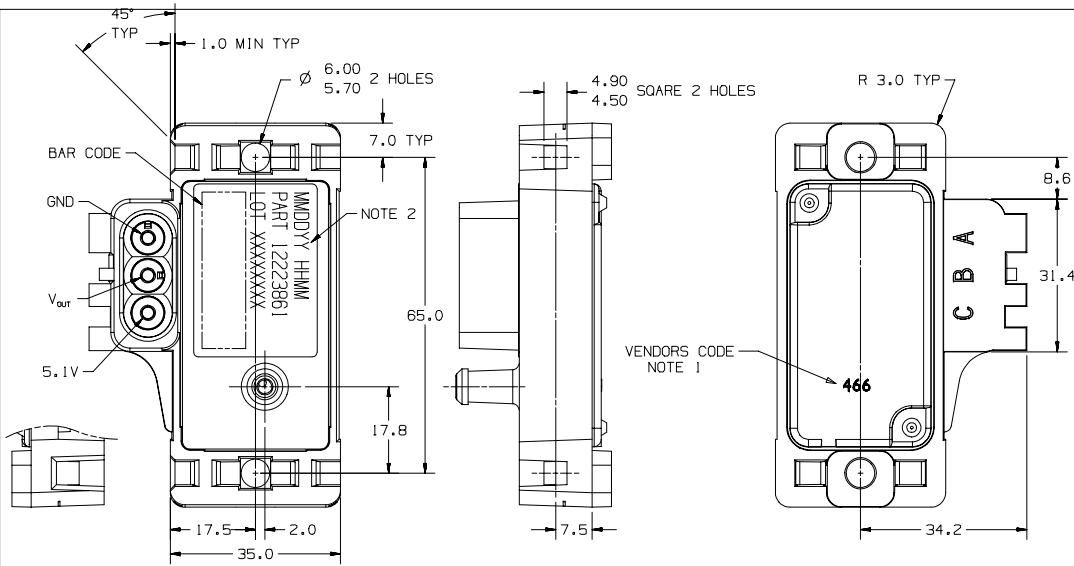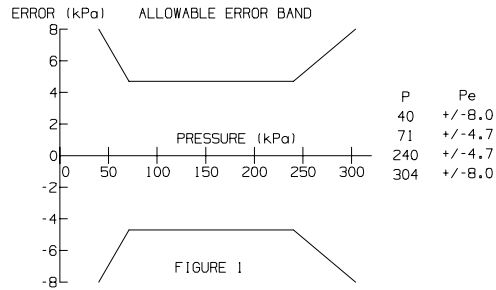


RATINGS

PARAMETER	SYMBOL	VALUE	UNITS
OPERATING PRESSURE	P	40 TO 304	kPa
OPERATING VOLTAGE	Vs	5.1 +/- 0.36	V
OPERATING TEMPERATURE	Ta	-40 TO 125	°C
STORAGE TEMPERATURE	Tstg	-50 TO 150	°C
OVER PRESSURE	Povr	2* MAX P	kPa
CURRENT DRAIN	ISMAX	20	mA
PRESSURE RESPONSE TIME *	Tp	6	ms
POWER UP RESPONSE TIME **	Tv	6.25	ms
OUTPUT NOISE ***	N	10	mV P-P
LEAK RATE (@ ANY OP. PRES.)	PLK	1.7 IN 30s	kPa

* 90% OF STEADY STATE RESPONSE TO CHANGE TO ANY OPERATING PRESSURE FROM ANY OTHER OPERATING PRESSURE.

** APPLICATION OF 4.74V PART MUST STABILIZE WITHIN +/-0.2 kPa.

*** OUTPUT NOISE DEFINED AS AC VOLTAGE > 10 KHz.

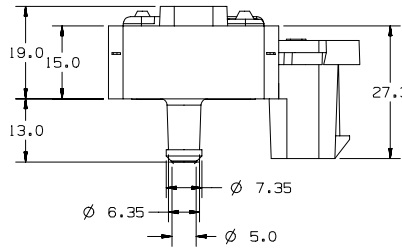

ERROR BAND MODIFICATION vs TEMP (deg C)

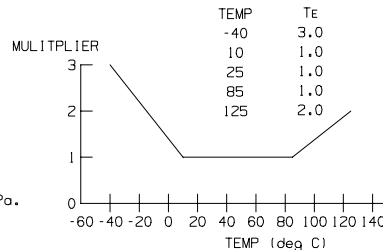


FIGURE 2

1. ORIENTATION OF VENDOR CODE IS OPTIONAL.
2. EXAMPLE BAR CODE LABEL ATTACHED IN AREA SHOWN. LABEL WILL INCLUDE PART NUMBER AND TRACEABILITY INFORMATION.
3. MUST MATE WITH PACKARD CONNECTOR 12103771.
4. RECOMMENDED MOUNTING PROCEDURE FOR THE PRESSURE SENSOR IS TO HAVE THE PORT POINTED DOWN WITHIN 30° OF VERTICAL. THIS WILL INSURE THAT ANY CONDENSATE OR LIQUID IN THE LINE WILL DRAIN AWAY FROM THE SENSOR CELL. THE PRESSURE SENSOR SHOULD BE MOUNTED HIGHER THAN THE VACUUM SOURCE TO ASSIST IN DRAINING THE LINE. MAXIMUM MOUNTING TORQUE 3.5N-m.
5. ELECTRIC OUTPUT:
 - 5.1 OUTPUT OF MODULE MUST BE IN ACCORDANCE WITH THE TRANSFER EQUATION WITHIN RATING SPECIFICATION $V_o = V_s (0.00318 P - 0.00353)$.
 - 5.2 ERROR FROM THE EQUATION MUST BE WITHIN THE FOLLOWING LIMIT ($V_o = V_o \pm V_e$); $V = V_s T_e$ (0.00318) T_e & P_e OBTAINED FROM FIG 1 & 2.
 - 5.3 WITH PART AT 25°C AND SUPPLY VOLTAGE AT 5.1V THE OUTPUT VOLTAGE (V_{out}) SHALL BE:

P	VOUT MIN	VOUT MAX
40	0.501	0.761
71	1.058	1.210
240	3.816	3.952
304	4.784	5.044
 - 5.4 THE LOAD IMPEDENCE SEEN BY SENSOR SHALL BE 51kOhm.
 - 5.5 V_s SHALL BE ISOLATED & FILTERED SUCH THAT INPUT NOISE IS NO GREATER THAN 10mV P-P.
6. PART WEIGHT: 57.0 gr ±10%

SCALE 2/1 DIST -

DELPHI
Automotive Systems

METRIC $1 \text{ mm} = 1 \text{ mm}$
UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN MILLIMETERS, AND THE TOLERANCES ARE:
ONE PLACE DECIMALS ± 0.4
TWO PLACE DECIMALS ± 0.25
ANGLES ± °
DRAFT ANGLES ± °
SHARP CORNERS ± °

GD&T SEE ASME Y14.5M-94 FOR GD&T INTERPRETATION
PDM CHANGES ALLOWED ONLY BY PDM DOCUMENT PROCEDURES
UG DO NOT SCALE
THIRD ANGLE PROJECTION

FIRST USED 12223861	DES DEREK A. DELRYMPLE	19AP02
REFERENCE GEN 1.5	APP R. LONGSTREET	19AP02
EXP MODEL -	APP J. SCHNEIDER	19AP02
EXP NUM 160068350	APP N/A	
APP N/A		

MATERIAL SPEC
-

RESTRICTED AND REPORTABLE CHEMICALS PER 6140359

KEY PRODUCT CHARACTERISTICS

SAFETY/COMPLIANCE	FIT/FUNCTION
TOTAL ON DRAWING	0
LAST NUMBER USED	0

DRAWING NAME
OUTLINE-P/SNSR

PART NUMBER
12223861

SHT 1 OF 1

U6 V16.0 1 SIZE A